


FK 长寿命 / 输入滤波用 (CD266)


- 长寿命 105°C 4000-5000 小时, 高可靠性. Long useful life: 4000-5000 hours at 105°C, High-reliability.
- 高电压, 到 500V. High rated voltage ,up to 500V.
- 高电压电源滤波用. Filtering of high voltages in power supplies.
- 符合 RoHS. RoHS Compliant.



主要技术性能 Specifications

项目 Item	特性 Performance Characteristics	
工作温度范围 Category Temperature Range	-40~+105°C	-25~+105°C
额定电压范围 Rated Voltage Range	160~250V _{dc}	350~500V _{dc}
标称电容量允许偏差 Capacitance Tolerance	±20% (+20°C, 120Hz)	
漏电流 Leakage Current	after 1 minutes at 20°C application of rated voltage,leakage current is not more than : CV ≤ 1000: I ≤ 0.06CV+40 ; CV>1000: I ≤ 0.03CV+70 (1分钟,20°C)	
损耗角正切值 (tgδ) Dissipation Factor (+20°C, 120Hz)	Rated Voltage(V _{dc})	160 200 250 350 400 450 500
	tgδ(Max.)	0.12 0.15 0.20
温度特性 (阻抗比 Max.) Temperature characteristics (Max. Impedance ratio) (120Hz)	Rated Voltage(V _{dc})	160 200 250 350 400 450 500
	Z(-25°C)/Z(+20°C)	3 6 8
	Z(-40°C)/Z(+20°C)	4 -
耐久性 Load Life	+105°C施加带额定纹波电流的额定电压规定时间 (Φ10: 4000 小时; Φ12.5-22: 5000 小时), 恢复 24 小时后: After applying rated voltage with specified ripple current for specified time (Φ10: 4000h; Φ12.5-22: 5000h) at +105°C and then resumed 24 hours: 电容量变化率 Capacitance change : ≤初始值的 ±20% ±20% of the initial value 损耗角正切值 Dissipation factor : ≤初始规格值的 300% 300% of the initial specified value 漏 电 流 Leakage current : ≤初始规格值 The initial specified value	
高温贮存 Shelf Life	+105°C, 1000 小时贮存后, 加额定工作电压处理 30 分钟, 恢复 24 小时后: After storage for 1000 hours at +105°C, U _R to be applied for 30 minutes and then resumed 24 hours: 电容量变化率 Capacitance change : ≤初始值的 ±20% ±20% of the initial value 损耗角正切值 Dissipation factor : ≤初始规格值的 200% 200% of the initial specified value 漏 电 流 Leakage current : ≤初始规格值 The initial specified value	

外形图及尺寸 Diagram of Dimensions

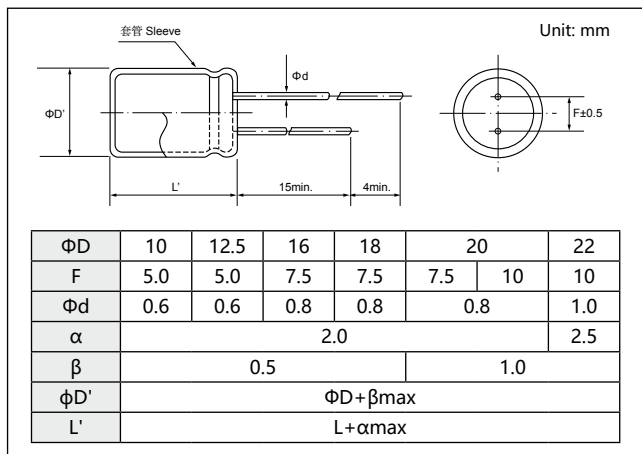

纹波电流修正系数 Multiplier for Ripple Current

频率系数 Frequency coefficient

Frequency (Hz)	50/60	120	300	1k	≥ 10K
Coefficient	0.75	1.00	1.20	1.35	1.50

温度系数 Temperature coefficient

Temperature (°C)	+70	+85	+105
Coefficient	1.80	1.40	1.00

标准品一览表 Standard Ratings

U _R (Surge Voltage) Code(V)	Capacitance (μF)	Size ΦD×L (mm)	Rated ripple current 105°C, 120Hz (mA _{rms})	Max ESR 20°C, 120Hz (Ω)	Typ ESR 20°C, 120Hz (Ω)
160 (200) 2C	10	10×16	95	19	7
	22	10×20	145	9	3.5
	33	12.5×20	190	6	2.2
	47	12.5×25	280	4	1.5
	47	16×20	280	4	1.5
	100	16×25	380	2	0.7
	100	18×20	380	2	0.7
	220	18×36	630	0.9	0.3
200 (250) 2D	4.7	10×12.5	60	41	14
	10	10×16	95	19	7
	22	10×20	145	9	3.5
	33	12.5×20	190	6	2.2
	47	12.5×25	280	4	1.5
	47	16×20	280	4	1.5
	100	16×31.5	410	2	0.7
	100	18×25	410	2	0.7
250 (300) 2E	4.7	10×12.5	60	41	14
	10	10×20	105	19	7
	22	12.5×25	180	9	3.5
	22	16×20	180	9	3.5
	33	12.5×25	250	6	2.2
	33	16×20	250	6	2.2
	47	16×25	300	4	1.5
	47	18×20	300	4	1.5
	100	16×31.5	410	2	0.7
	100	18×25	410	2	0.7
350 (400) 2V	3.3	10×12.5	50	72	28
	4.7	10×16	65	51	19
	10	12.5×20	120	24	10
	22	12.5×25	180	11	4
	22	16×20	180	11	4
	33	16×25	210	7	2.5
	47	16×35.5	300	5	1.8
	47	18×31.5	300	5	1.8
	400 (450) 2G	2.2	10×12.5	40	109
3.3		10×16	50	72	19.9
4.7		10×20	70	51	14.0
10		12.5×20	120	24	6.6
22		16×25	200	11	3.0
22		18×20	200	11	3.0
33		16×31.5	245	7	2.0
33		18×25	245	7	2.0
47		18×31.5	300	5	1.4
450 (500) 2W		1	10×12.5	30	318
	2.2	10×16	45	145	39.8
	3.3	10×20	65	96	26.5
	4.7	12.5×20	80	68	18.6
	10	12.5×25	140	32	8.8
	22	16×25	220	14	4.0
	33	16×31.5	280	10	2.7
	47	16×31.5	420	5.6	1.9
	68	16×35.5	520	3.9	1.3
	82	18×31.5	580	3.2	1.1
500 (550) 2H	100	18×36	750	2.6	0.9
	120	18×40	800	2.2	0.7
	150	20×41	860	1.7	0.6
	180	22×41	920	1.4	0.5
	1	10×12.5	32	265.4	106.2
	2.2	10×16	49	120.6	48.3
	3.3	10×20	68	80.4	32.2
	4.7	12.5×20	84	56.5	22.6
	10	12.5×25	145	26.5	10.6
	22	16×25	230	12.1	4.8
33	16×31.5	295	8.0	3.2	
47	18×31.5	415	5.6	2.3	
68	18×36	530	3.9	1.6	
82	18×40	590	3.2	1.3	
100	20×41	750	2.7	1.1	
120	22×41	810	2.2	0.9	
150	22×45	930	1.8	0.7	

可根据客户需要定制产品 Customer products are available on request.